

Anti-Fouling Brackish Water Reverse Osmosis (RO) Element LG BW 4040 AFR



Overview

LG Chem's anti-fouling (AF) brackish water NanoH₂O™ RO membranes feature proprietary chemistry that reduces performance deterioration due to organic and biological fouling. Even with higher-fouling feed water, LG Chem's unique AF formulation maintains membrane stability and performance without compromising the highly permeable nature of the membrane's surface.

- High rejection membrane that delivers superior water quality
- Excellent fouling resistance
- Well suited for low quality feed water across varying operating conditions




Product Specifications

Configuration: 4-inch spiral wound
Membrane Polymer: Thin-film nanocomposite (TFN) polyamide

Part Number	Permeate flow rate m ³ /d (gpd)	Minimum NaCl Rejection %	Stabilized NaCl Rejection %	Active Membrane Area m ² (ft ²)	Feed Spacer mil
LG BW 4040 AFR	8.7 (2,300)	99.3	99.6	7.4 (80)	34

Note: The above values are normalized to the following conditions: 2,000 ppm NaCl, 15.5 bar (225 psi), 25°C (77°F), pH 6.5 - 7.0, 15% recovery. Permeate flows for individual elements may vary +/- 20%.

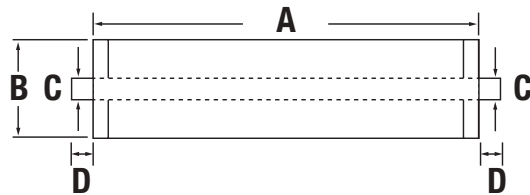

Part Number	Length A	Element O.D. B	Core Tube I.D. C	Core Tube Extension D	Weight kg (lbs.)
LG BW 4040 AFR	1016 mm (40 in.)	100 mm (3.9 in.)	19 mm (0.75 in.)	27 mm (1.05 in.)	3.6 (8.0)

Operating Specifications

For more information and operating guidelines, visit www.LGwatersolutions.com

Max. Operating Pressure:	41 bar (600 psig)
Max. Chlorine Concentration:	< 0.1 ppm
Max. Operating Temperature:	45°C (113°F)
pH Range, Continuous (Cleaning):	2 - 11 (2-12)
Max. Feedwater Turbidity:	1.0 NTU
Max. Feedwater SDI (15 mins):	5.0
Max. Feed Flow:	3.6 m ³ /h (16 GPM)

The information and data contained herein are deemed to be accurate and reliable and are offered in good faith, but without guarantee of performance. LG Chem assumes no liability for results obtained or damages incurred through the application of the information contained herein. Customer is responsible for determining whether the products and information presented herein are appropriate for the customer's use and for ensuring that customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Specifications subject to change without notice. NanoH₂O is a trademark of LG Chem, Ltd. LG Water Solutions is part of LG Chem, Ltd. All rights reserved. © 2016 LG Chem



LG Twin Towers • 128 Yeoui-daero, Yeongdeungpo-gu • Seoul, 150-721 • Republic of Korea
Tel: +82 2 3773 7265 • Fax: +82 2 3773 8798 • www.LGwatersolutions.com

Rev. A (08.15)